

# Medical 4K Video Recorder


## IPS740DG



Record video and capture still images in crystal-clear 4K resolution. The IPS740DG recorder comes with a rich set of features that will upgrade any medical video application. This recorder integrates with VACS® software for video archiving and collaboration.

Simultaneously record files to the internal hard drive and external USB drive. 4 TB of internal storage allows for extended recording times. Also record and playback video content in 3D formats.

Use the integrated 5 inch touchscreen, or switch to an external monitor to control all recording, playback, saving functions, or to preview the active video signal.



### Focus on Compatibility

IPS740DG connects with medical image generating devices, and with patient information systems, to accurately record and store video or captured still images.

Input signal options:


- 3G/12G-SDI
- DisplayPort 1.2
- HDMI 2.0

File management options:

- DICOM & HL7 Integration
- DICOM Modality Worklist
- DICOM MPPS
- DICOM C-Store
- HL7 Appointment Booking


Additional medical A/V integration options

- Patient search & query
- Medical printer compatible
- Gigabit Ethernet
- 4 x USB 3.0 ports
- Audio inputs/output
- 2 x foot pedal inputs

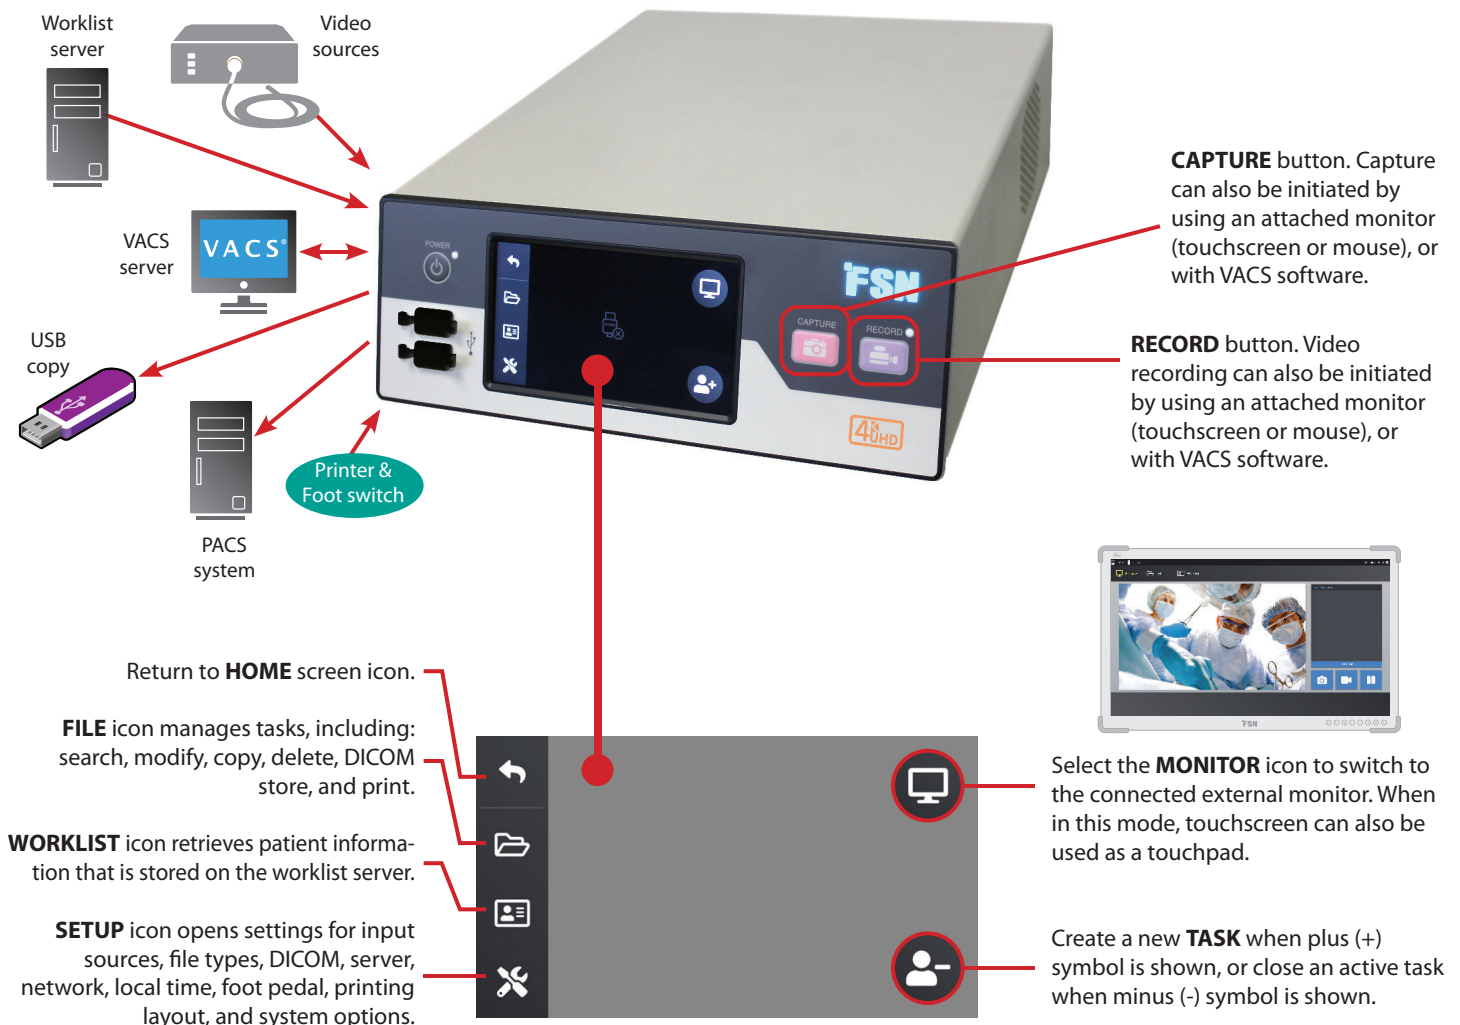

# Medical 4K Video Recorder

## IPS740DG

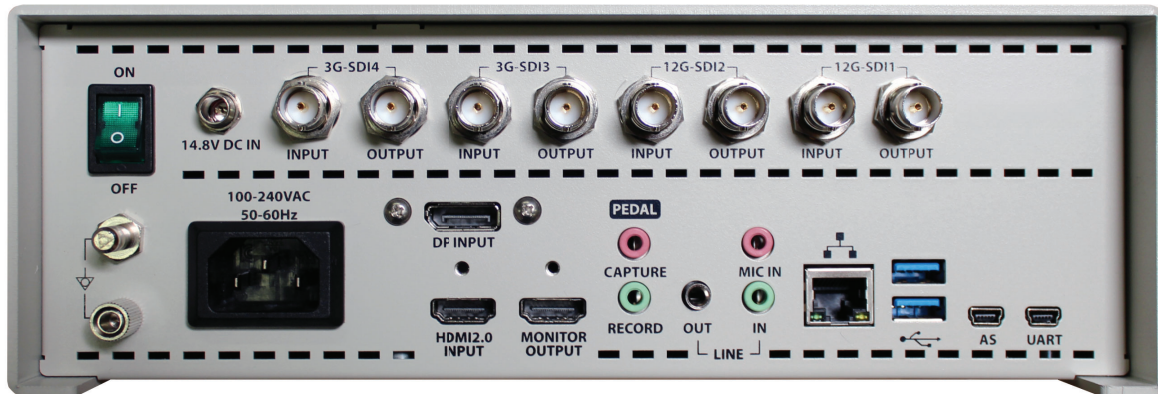

### General Features

Item	Description
Main Functions	Video recording Up to 3840 x 2160P 60Hz 4096 x 2160P 60Hz
	Still image capture Up to 3840 x 2160P 4096 x 2160P
	Standalone preview Front LCD screen
	Menu access Front LCD screen (5 inch touch enabled) GUI on HDMI monitor output.
	DICOM, HL7 DICOM Store (Image) Modality Worklist MPPS Appointment Booking (HL7)
Inputs	DICOM store Direct Access to PACS
	HDMI 2.0
	DisplayPort 1.4
	SDI 12G-SDI, 2SI, Quad
Outputs	Audio 3.5mm Stereo x 2ea Mic in, Line in
	Monitor output HDMI 2.0
	Loop-through 12G-SDI, 2SI, Quad
Data I/O	Audio 3.5mm Stereo line out
	USB 3.0 2 on front, 2 on back
	RS-232C Mini-USB
	Ethernet RJ45 x 1 (10/100/1000M)
	Keyboard / Mouse USB type
	Foot pedal 3.5mm stereo jack x 2 Recording, Capture

Item	Description
Recording and Capture	Recording resolution 4096x2160p60 3840x2160p60 1920x1080p60
	Encoding formats H.264, H.265
	Recording file format MP4
	Capture image format BMP, JPEG, DICOM
	Audio encoding format AAC
Storage	3D video formats 4K line alternative (SBSH conversion) 4K side-by-side half
	Internal hard drive 4TB
	External USB storage USB flash drive USB HDD
	USB file system FAT32, NTFS
	Network file system CIFS
General	Network transfer FTP (client)
	Power requirements AC 100-240V / 50-60Hz, 1.0A - 0.6A (max)
	Power consumption 60W (max)
	Dimensions 260mm (10.2 in.) wide x 95mm (3.7 in.) high x 330mm (13 in.) deep
	Weight 4.1kg (9.0lbs.)
Compliance & Certifications	Temperature Operating: 0° to +40° C (+32° to +104° F) Storage: -20° to + 60° C (-4° to +140° F)
	Humidity Operating: 10 - 85% RH Storage: 10 - 85% RH
CE-MDR 2017/745 Class 1 Medical Device, UL 60601-1, IEC60601-1, EN 60601-1-2, FCC Part 15B, CCC, ISO9001, ISO13485, RoHS	

#### Foreseeson Custom Displays, Inc.

2210 E. Winston Road  
Anaheim, CA 92806 USA  
Tel: 714-300-0540  
Fax: 714-300-0546

Latin America  
Aventura, FL 33180 USA  
Tel: 714-507-3855

#### Foreseeson Korea

B-408, U-Space2  
670 Daewangpangyo-ro,  
Bundang-gu, Seongnam-si  
Gyeonggi-do, Republic of Korea  
Tel: +82-31-8017-0780

#### fsnmed.com

#### Foreseeson GmbH

Industriestrasse 38a  
63150 Heusenstamm, Germany  
Tel: +49 6104 64398 0  
Fax: +49 6104 64398 11

#### Foreseeson UK Ltd.

1<sup>st</sup> floor, Hornbeam House, 81 Bridge Road  
East Molesey  
Surrey  
KT8 9HH  
United Kingdom  
Tel: +44 (0) 208 546 1047

#### Foreseeson (Shanghai)

Medical Equipment Co., Ltd.  
Room 1010, Building A  
1439 Wuzhong Road  
Rhein Hongjing Center  
Minhang District, Shanghai, China  
Tel: 18521095596

Specifications are subject to change with or without notice. Doc. # FSN2012 Rev. 7/25